


Recovery unit VRR12L-R32

Refrigerant recovery unit is used for the recovery of refrigerant HFC and HCFC.

The main features:

- rapid recovery of refrigerant
- little handy recovery unit
- equipped with a high and low pressure gauge
- manual reset
- one knob for easy operation

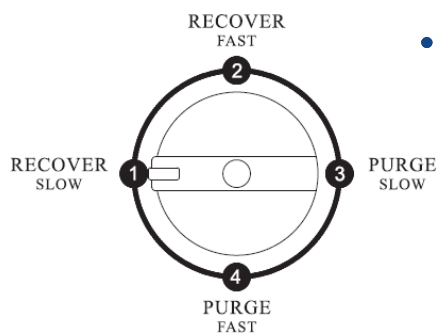

One Key Operation



• *Chinese patent*



Recovery unit VRR12L-R32

Refrigerant: category III	R-12,R-134a,R-401C,R-500,1234yf
Refrigerant: category IV	R-22,R-401A,R-401B,R-402B,R-407C,R-407D,R-408A,R-409A,R-411A,R-411B,R-412A,R-502,R509
Refrigerant: category V	R-402A,R-404A,R-407B,R-410A,R-507,R-32
Power supply	230/50 V/Hz
Motor	3/4 HP
Motor speed	1450 rpm
Maximal current draw	4A
Compressor	Oil-less, Air-cooled, Piston-style
Automatic safety Shut-off	38.5bar/3850kPa(558psi)
Recovery rate : category III - vapor / liquid / push/pull	0,20 / 1,60 / 4,60 kg/min
Recovery rate : category IV - vapor / liquid / push/pull	0,25 / 1,80 / 5,60 kg/min
Recovery rate : category V - vapor / liquid / push/pull	0,25 / 2,20 / 6,30 kg/min
Operating temperature	0 ÷ 40 °C
Dimensions	450 x 250 x 355 mm
Weight	13 kg