

# FX Range

for supporting pipe work, cable trays  
and small outdoor condensing units




100% UK Manufacture



The 7 feet of the FX range are a practical and versatile support solution for pipe work and cable trays. They can also be used for smaller outdoor condensing units or air source heat pump installations

The feet can have either a 41mm x 21mm 'glued' in' pre galvanised steel channel or our new 'moulded in' aluminium t-bar channel, which is recessed into the top face allowing you to use standard strut fixings to secure your services to the feet

The range of products are made of durable recycled rubber, which offers built-in anti-vibration and makes it both economical and environmentally friendly

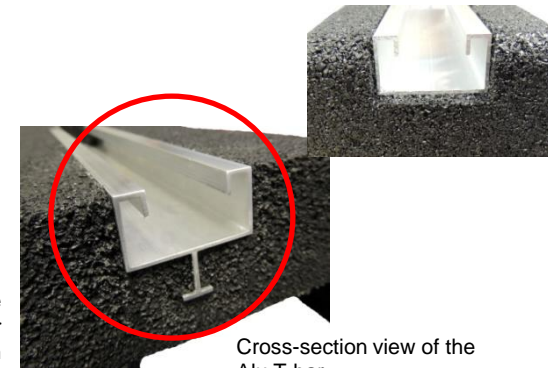


End view of the Alu T-bar

The T-bars are even more eco friendly as the need for adhesive to hold the channel in place has been completely eliminated

Cross-section view of the Alu T-bar

Product Code	Model	Height (mm)	Width (mm)	Length (mm)	Max. Loading per foot (kg)	FX Weight (kg)
		A	B	C		
COMBI 07	FX 250	100	183	250	160	2.5
COMBI 08	FX 400	100	183	400	240	4.5
COMBI 09	FX 500	80	160	520	400	4.75
COMBI 11	FX 600	100	225	600	450	8.15
COMBI 13	FX 1000	100	183	1000	645	13.5
COMBI 14	FX 250 Low	50	132	250	160	1.5
COMBI 15	FX 400 Low	50	132	400	240	2.46

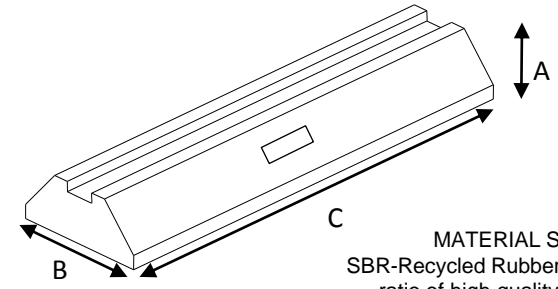

**MATERIAL SPECIFICATION**  
SBR-Recycled Rubber. Bound using a ratio of high quality moisture curing Polyurethane Pre-Polymer. UV RESISTANT  
Temperature Range: -20°C to +80°C  
BS7188:1989 & BS5696 Part 3:1979  
All dimensions +/- 2mm. Weight per unit +/- 3%